


Hdw Prep Codes:

- 345 = 3 ea 4 1/2" hinge preps
- 345H = 3 ea. 4 1/2" HW preps
- 445 = 4 ea. 4 1/2" hinge preps
- 350 = 3 ea 5" hinge preps
- 350H = 3 ea. 5" HW preps
- 450 = 4 ea. 5" hinge preps
- E### = Elec. prefix for hinge code
- FMCH = Blk HJ - Full Mort. Cont. Hinge
- FSCH = Blk HJ - Full Surf. Cont. Hinge
- PVT = Pivot prep (see template)
- DPS = Door position switch (see templ.)
- ASA = 4 7/8" ANSI strike
- DL = 2 3/4" Deadlock Strike
- BLK = Blank SJ (silencer holes only)
- NS = No silencer holes

Anchor:

- 5 = Welded steel stud 'Z' anchor (Inset)
- 5F = Welded steel stud 'Z' anchor (Flush)
- 7 = Snap in combo stud
- 7A = 2 pc. adjustable combo stud
- 8 = Punch & Dimple (P&D)
- 8E = #8 w/ Exp. bolts (Masonry)
- 8W = #8 w/ Wood lag screws
- 9 = Wire masonry anchors
- 12 = wood stud welded straps
- 14 = Compression w/ base straps
- 15 = Compression w/ base dimples
- SCR = Screws on face & covered by trim

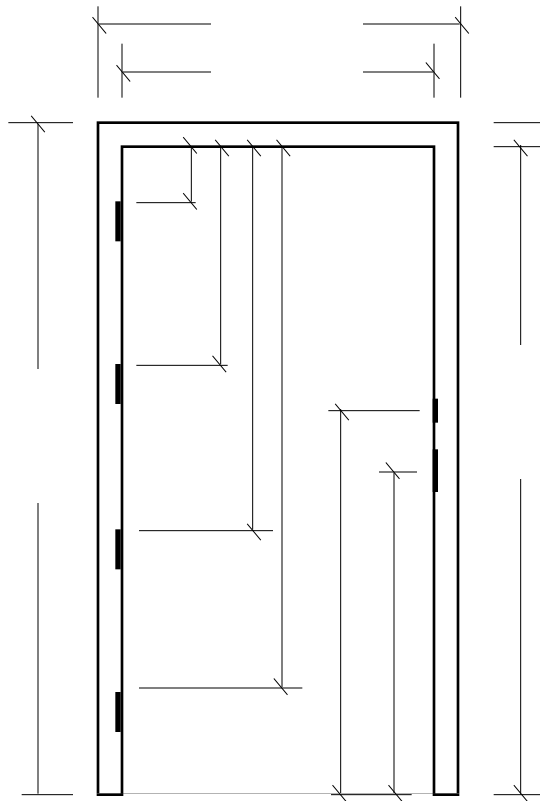

eightynineA

Manufacture Hdw Locations

- Amweld
- Steelcraft
- Ceco
- Curries
- Other _____

Surface Reinforcements (SR):

- 1 = Reg. Arm (RA)
- 2 = Parallel Arm (PA)
- 4 = Top Jamb
- 7 = Surf. OH Stop
- 10 = Rim Panic Surf. Strike
- 16 = DA Door Surf. Pivots
- 19 = Mort. Continuous Hinge
- 20 = 12 ga. Continuous Head Full Profile
- 21 = Full Surface Continuous Hinge
- 99 = Custom (see drawing)

| | | | | |
|--|---|--|-----------------|---|
| Door Opening Size: | Overall Size: | Jamb Depth: | Throat Opening: | Profile Code: |
| Gauge: <input type="checkbox"/> 16 <input type="checkbox"/> 14 <input type="checkbox"/> 12 <input type="checkbox"/> 20 <input type="checkbox"/> 18 Material: <input type="checkbox"/> A60 <input type="checkbox"/> CRS <input type="checkbox"/> Stainless | Finish: <input type="checkbox"/> Spot Prime <input type="checkbox"/> Fully Prime <input type="checkbox"/> BR <input type="checkbox"/> BK <input type="checkbox"/> WH <input type="checkbox"/> AL | <input type="checkbox"/> Unequal Rabbet <input type="checkbox"/> Equal Rabbet <input type="checkbox"/> 4" Face Head (Opt.) | | Profile Codes: D = Dble Rabbet DW = Drywall Returns S = Single Rabbet C = Cased Open DE = Dble Egress ##L = Lead Suffix PFHM = Prefinished HM |
| HJ Prep: | | | | |
| SJ Prep: | * 1/2" Returns are standard for HMF's. No returns for PFHM, WD or Alum. | | | |
| <input type="checkbox"/> Knocked-down (Installed K.D.) <input type="checkbox"/> Knocked-down (Welded by others) <input type="checkbox"/> Welded <input type="checkbox"/> Full Throat Welded (Extra) | | | | |

Instructions: _____

| Qty: | Hand: | Reinforcements: | | Anchors: | Fire Label: | Mark (opening) # |
|------|-------|-----------------|---------|----------|-------------|------------------|
| | | Head | Jamb(s) | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | | | |
|--|---------|--------------------------------|-----------|
| eigthynineA 6745 S. Harl Ave., Suite 102 Tempe, AZ 85283 480-838-1620 phone 480-838-1618 fax | | Single Frame Order Form | |
| Company Name: | P.O. #: | Job Name: | Page: Of: |